

SOFAR

SOFAR

Battery Energy Storage System

Power Magic



EMAIL
info@sofarsolar.com

WEBSITE
www.sofarsolar.com

Shenzhen SOFARSOLAR Co., Ltd.
Copyright © 2024 Shenzhen SOFARSOLAR Co., Ltd. All Rights Reserved

SOFAR INTRODUCTION

SOFAR is a global leading supplier of solar PV and energy storage solutions and committed to be the leader of digital energy solutions. SOFAR supports the transition to renewable energy through a comprehensive portfolio including PV inverters range from 1 kW to 255 kW, hybrid inverters range from 3 kW to 20 kW, battery storage system and smart energy management solutions for residential, commercial & industrial. and utility -scale applications.

Founded in 2013, SOFAR has always insisted on independent innovation and established a global R&D network with three R&D centers. Over 300 employees of its workforce is assigned to R&D, ensuring continuous innovation in order to remain a pioneer in the PV and energy storage industry.

SOFAR has implemented a globalization strategy since its establishment and now has two global manufacturing bases with an annual production capacity of 1.0 GW PV and storage inverters, and 1 GWh batteries. Its extensive service network contains over 20 branch offices worldwide. SOFAR offices can now be found in the UK, Poland, Germany, South Korea, UAE, Pakistan, Australia, etc. By the end of 2021, SOFAR had shipped over 1 million inverters to more than 90 countries.

As the world's fastest-growing solar energy brand. SOFAR stands firmly among the mainstream solar energy brands with a compound annual growth rate of 86% from 2019 till 2021. SOFAR has received many awards for its state-of-the-art solutions. including the China "CQC" certification. the Chinese Top 5 String Inverter Brand, and the TOP 5 Global Hybrid Inverter Manufacturer. SOFAR has also been entitled by Eu PD as TOP Brand PV Inverter in India, Poland, the U.K., Italy and Brazil.

Looking forward, SOFAR believes technology drives the green energy transition. Through independent. continuous innovation and state-of-the-art PV solar and energy storage solutions, SOFAR aims to play a key role in this global transition.

PRODUCT PORTFOLIO

C&I ESS PowerMagic (400V)

01-12

- Energy Storage Cabinet
 - Battery Cabinet
 - 400V Junction Cabinet
 - Backup Cabinet
 - EBI 125K-R
-

C&I ESS PowerMagic (690V)

13-24

- Energy Storage Cabinet
- Battery Cabinet
- Transformer Cabinet
- MV Backup Cabinet
- EBI 215K-R

C&I ESS

POWER MAGIC




C&I ESS-PowerMagic - AC 400V

Efficient & Flexible

Lower LCOS

Ultimate safety

Smart Management

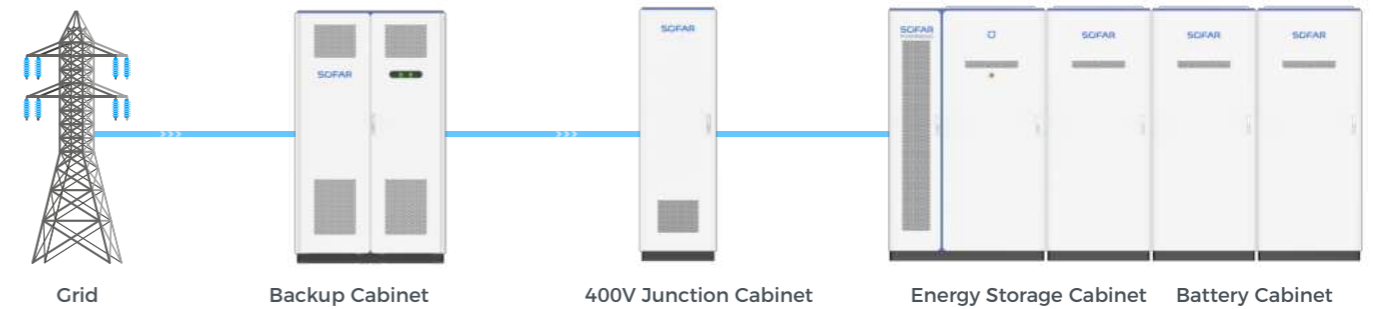

Lower LCOS

All-in-one design, High energy density
Plug-and-play design, quick installation & less cost

Efficient & Flexible

Modular design supports parallel connection
and easy system expansion
Grid-On/Off auto-switch function, easy O&M


Ultimate Safety

3+2 protection design enables ultimate safety
Electricity and liquid separation reduces system risks

Smart Management

Integrated EMS enables multi-scenario energy
management
Fast state monitoring and faults record enables
pre-alarm and faults locating

Energy Storage Cabinet

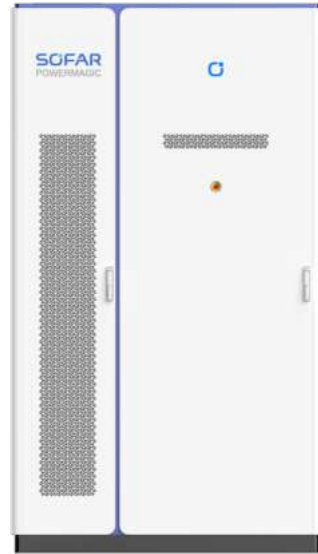

Product Advantages

- Modular design, flexible system expansion
- Grid-on/off auto-switch
- Electrical cables and liquid pipes separated design
- 3 Level FSS+ Flammable gas emission & Explosion vents
- Liquid cooling + Anti-condensation design
- Multi-function EMS integrated



| Model | ESS-258kLA-SA1 | ESS-215kLA-SA1 |
|-------------------------------|---|----------------|
| DC side | | |
| Battery type | LFP/280Ah | |
| Rated energy | 258kWh (6Pack) | 215kWh (5Pack) |
| Rated Voltage | 921.6V | 768V |
| DC operating voltage range | 734.4V-1036.8V DC | 612V-864V DC |
| Recommend DC voltage range | 777.6V-1022.4V DC | 648V-852V DC |
| AC side | | |
| AC Voltage | 400V AC | |
| Rated power | 125kW | |
| Maximum AC power | 138kW | |
| Maximum AC current | 198A | |
| Rated grid frequency | 50Hz/60Hz | |
| Power factor | -1-1 | |
| System Parameters | | |
| Operating ambient temperature | -30°C-50°C (Derating above 45°C) | |
| Storage ambient temperature | -30°C-60°C | |
| Operating relative humidity | 0-100% (No condensation) | |
| Cooling type | Liquid cooling | |
| Fire suppression | 1. Battery cell level (perfluorohexanone) 2. Canibet level (perfluorohexanone or aerosol) 3. Water fire suppression | |
| System configuration | AC side: Maximum 6 Energy storage cabinets in parallel DC side: Maximum 3 Battery cabinets per Energy storage cabinet | |
| Grid-On/Off | Auto-switch (With backup cabinet) | |
| Cabinet connection | Plug-in connector | |
| Dimension(W*D*H) | 1450*1350*2200mm | |
| Weight | <2.8T | <2.5T |
| Ingress protection rating | IP55 | |
| Anti-corrosion | C4 (C5 optional) | |
| Operating altitude | ≤4000m (Derating above 2000m) | |
| Installation | Ground mounting | |
| Communication interface | Ethernet, Dry connect | |
| Standard | IEC/EN 61000-6-2/4 , IEC62477-1 , IEC62619, UN38.3, UL9540A, UL1973 | |

* All specifications are subject to change without notice.

Battery Cabinet



Product Advantages

- Modular design, flexible system expansion
- Electrical cables and liquid pipes separated design
- 3 Level FSS + Flammable gas emission & Explosion vents
- Liquid cooling + Anti-condensation design



| Model | ESS-258kLA-BD1 | ESS-215kLA-BD1 |
|-------------------------------|---|----------------|
| Battery type | LFP/280Ah | |
| Rated energy | 258kWh (6Pack) | 215kWh (5Pack) |
| Rated Voltage | 921.6V | 768V |
| DC operating voltage range | 734.4V-1036.8V DC | 612V-864V DC |
| Recommend DC voltage range | 777.6V-1022.4V DC | 648V-852V DC |
| Operating ambient temperature | -30°C~50°C (Derating above 45°C) | |
| Storage ambient temperature | -30°C~60°C | |
| Operating relative humidity | 0-100% (No condensation) | |
| Cooling type | Liquid cooling | |
| Fire suppression | 1. Battery cell level (perfluorohexanone) 2. Cabinet level (perfluorohexanone or aerosol) 3. Water fire suppression | |
| Communication interface | CAN, RS485 | |
| Cabinet connection | Plug-in connector | |
| Dimension(W*D*H) | 1000*1350*2200mm | |
| Weight | <2.5T | <2.2T |
| Ingress protection rating | IP55 | |
| Anti-corrosion | C4 (C5 optional) | |
| Operating altitude | ≤4000m (Derating above 2000m) | |
| Installation | Ground mounting | |
| Standard | IEC62619, UN38.3, UL9540A, UL1973 | |

* All specifications are subject to change without notice.

400V Junction Cabinet



Product Advantages

- Non-Walk-In design with less footprint
- Easy installation and O&M
- Support installation against wall
- Maximum 6 Energy Storage Cabinets in Parallel



| Model | PAC-750K-H1 |
|-------------------------------|-------------------------------------|
| Input side | |
| Rated operating voltage | 400V AC, Three-phase four-wire |
| Rated current | 6*180A (max 6 cabinets in parallel) |
| Maximum current | Max 1188A |
| Rated input power | 6*125kW |
| System Parameters | |
| Operating ambient temperature | -30°C ~ 50°C (Derating above 45°C) |
| Storage ambient temperature | -30°C ~ 60°C |
| Relative humidity | 0 ~ 100% (No condensation) |
| Maximum operating altitude | ≤2000m (Customized if above) |
| Ingress protection rating | IP55 |
| Anti-corrosion | C4 (C5 optional) |
| Wire inlet & outlet | Bottom inlet, bottom outlet |
| Dimension(W*D*H) | 700*700*2182mm |
| Weight | < 300kg |
| Installation | Ground mounting |
| Standard | IEC/EN 61439-2 |

* All specifications are subject to change without notice.

Backup Cabinet



Product Advantages

- Grid-on/off auto-switch
- Pre-assembled design, less on-site renovation
- Easy installation and O&M

| Model | PAC-750K-W1 |
|-------------------------------|---|
| Rated voltage | 400V AC |
| Rated current | 2*6*180A |
| Rated frequency | 50Hz/60Hz |
| Grid-On/Off | Auto-switch |
| Ingress protection rating | Enclosure IP4X, Internal cubicle IP2X (indoor installation) |
| Operating ambient temperature | -15°C ~ 40°C (indoor installation) |
| Storage ambient temperature | -30°C ~ 60°C |
| Dimension(W*D*H) | 1300*800*2200mm |
| Maximum operating altitude | ≤4000 (Standard ≤ 2000m, customized above 2000m) |
| Communication interface | RS485 |
| Standard | IEC/EN 61439-2 |

* All specifications are subject to change without notice.





Product advantages

High Yield

- Advanced three-level technology, max. efficiency 98.9%
- Effective forced air cooling, no derating up to 45°C
- Rack level management, more yielding

Flexible & Reliable

- Bidirectional power conversion system with full four-quadrant operation
- Modular design, easy for design & maintenance
- IP66 protection degree, suitable for outdoor installation

Grid Support

- Compliant with CE, IEC 62477 and grid regulations
- L/HVRT, Fast active/reactive power response



| Model | EBI 125K-R |
|--|---|
| DC Side | |
| Maximum DC Voltage | 1200 V |
| DC Voltage Working Range | 600-1200 V |
| Maximum DC Current | 220 A |
| AC Side (Grid-on) | |
| Rated AC Power | 125 kW |
| Maximum AC Active Power | 138 kW |
| Maximum AC Apparent Power | 138 kVA |
| Rated AC Current | 180 A |
| Maximum AC Current | 198 A |
| Rated Grid Voltage | 400V 3W+PE |
| Grid Voltage Range | 340-440V |
| Rated Grid Frequency | 50 / 60 Hz |
| Grid Frequency Range | 45-55Hz /55-65Hz |
| Power Factor | -1-1 |
| Current Total Harmonic Distortion (@Rated Power) | <3% |
| System Characteristics | |
| Working Temperature | -35°C-60°C |
| Relative Humidity | 0-100%, no condensation |
| Noise level | <75 dB |
| Maximum Working Altitude | 4000m |
| Cooling method | Temperature controlled forced air cooling |
| Communication port | CAN, RS485, Ethernet |
| Degree of Protection | IP66 |
| Mechanical Parameters | |
| Dimensions (W*H*D) | 740*265*850mm (without terminals) |
| Weight | <93 kg |

* If the size and parameters of the product are changed, the latest information of the company shall prevail without prior notice.

C&I ESS

POWER MAGIC




C&I ESS-PowerMagic - AC 690V

Efficient & Flexible

Lower LCOS

Ultimate safety

Smart Management

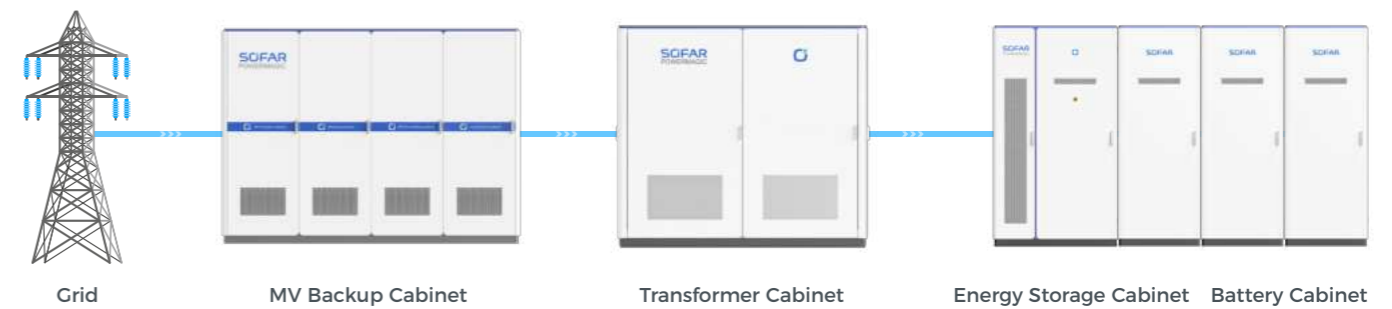

Lower LCOS

All-in-one design, High energy density
Plug-and-play design, quick installation & less cost

Efficient & Flexible

Modular design supports parallel connection
and easy system expansion
Grid-On/Off auto-switch function, easy O&M


Ultimate Safety

3+2 protection design enables ultimate safety
Electricity and liquid separation reduces system risks

Smart Management

Integrated EMS enables multi-scenario energy
management
Fast state monitoring and faults record enables
pre-alarm and faults locating

Energy Storage Cabinet

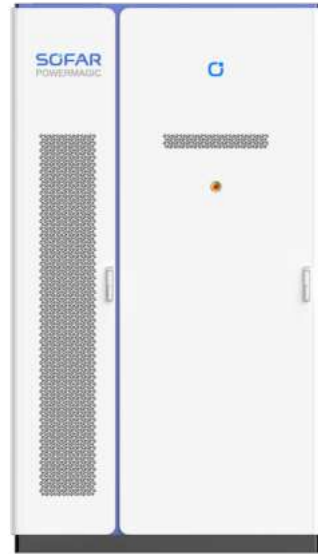

Product Advantages

- Modular design, flexible system expansion
- Grid-on/off auto-switch
- Electrical cables and liquid pipes separated design
- 3 Level FSS+ Flammable gas emission & Explosion vents
- Liquid cooling + Anti-condensation design
- Multi-function EMS integrated



| Model | ESS-344kLA-SA1 |
|-------------------------------|---|
| DC side | |
| Battery type | LFP/280Ah |
| Rated energy | 344kWh (8Pack) |
| Rated Voltage | 1228.8V |
| DC operating voltage range | 979.2V-1382.4V DC |
| Recommend DC voltage range | 1036.8-1363.2V DC |
| AC side | |
| AC Voltage | 690V AC |
| Rated power | 215kW |
| Maximum AC power | 237kW |
| Maximum AC current | 198A |
| Rated grid frequency | 50Hz/60Hz |
| Power factor | -1-1 |
| System Parameters | |
| Operating ambient temperature | -30°C-50°C (Derating above 45°C) |
| Storage ambient temperature | -30°C-60°C |
| Operating relative humidity | 0-100% (No condensation) |
| Cooling type | Liquid cooling |
| Fire suppression | 1. Battery cell level (perfluorohexanone) 2. Canibet level (perfluorohexanone or aerosol) 3. Water fire suppression |
| System configuration | AC side: Maximum 6 Energy storage cabinets in parallel DC side: Maximum 3 Battery cabinets per Energy storage cabinet |
| Grid-On/Off | Auto-switch (With backup cabinet) |
| Cabinet connection | Plug-in connector |
| Dimension(W*D*H) | 1450*1350*2550mm |
| Weight | < 3.5T |
| Ingress protection rating | IP55 |
| Anti-corrosion | C4 (C5 optional) |
| Operating altitude | ≤4000m (Derating above 2000m) |
| Installation | Ground mounting |
| Communication interface | Ethernet, Dry connect |
| Standard | IEC/EN 61000-6-2/4 , IEC62477-1 , IEC62619, UL 9540, UN38.3, UL9540A, UL1973 |

* All specifications are subject to change without notice.



Product Advantages

- Modular design, flexible system expansion
- Electrical cables and liquid pipes separated design
- 3 Level FSS + Flammable gas emission & Explosion vents
- Liquid cooling + Anti-condensation design



| Model | ESS-344kLA-BD1 |
|-------------------------------|---|
| Battery type | LFP/280Ah |
| Rated energy | 344kWh (8Pack) |
| Rated Voltage | 1228.8V |
| DC operating voltage range | 979.2V~1382.4V DC |
| Recommend DC voltage range | 1036.8~1363.2V DC |
| Operating ambient temperature | -30°C~50°C (Derating above 45°C) |
| Storage ambient temperature | -30°C~60°C |
| Operating relative humidity | 0~100%(No condensation) |
| Cooling type | Liquid cooling |
| Fire suppression | 1.Battery cell level (perfluorohexanone) 2.Canibet level (perfluorohexanone or aerosol) 3. Water fire suppression |
| Communication interface | CAN, RS485 |
| Cabinet connection | Plug-in connector |
| Dimension(W*D*H) | 1000*1350*2550mm |
| Weight | <3.2T |
| Ingress protection rating | IP55 |
| Anti-corrosion | C4 (C5 optional) |
| Operating altitude | ≤4000m (Derating above 2000m) |
| Installation | Ground mounting |
| Standard | IEC62619, UN38.3, UL9540A, UL1973 |

* All specifications are subject to change without notice.

Transformer Cabinet



Product Advantages


- Non-Walk-In design with less footprint
- Full isolation of high and low voltage
- Easy installation and O&M
- Support installation against wall
- Maximum 6 Energy Storage Cabinet in Parallel



| Model | PAC-1M29-T1 |
|-------------------------------|---|
| LV side | |
| Rated operating voltage | 0.69kV/10kV AC |
| Rated icurrent | 6*180A (max 6 cabinets in parallel) |
| Maximum current | Max 1188A |
| Rated input power | 1290kW(max 6 cabinets in parallel) |
| MV side | |
| Rated operating voltage | 10kV/20kV/33kV etc., Three-phase three-wire |
| Rated output current | 75A @ 10kV |
| Rated output power | 1290kW |
| Maximum output power | Max 1419kW |
| System Parameters | |
| Operating ambient temperature | -30°C~50°C (Derating above 45°C) |
| Storage ambient temperature | -30°C~60°C |
| Relative humidity | 0~100%(No condensation) |
| Maximum operating altitude | ≤2000m(Customized if above) |
| Ingress protection rating | IP55 |
| Anti-corrosion | C4 (C5 optional) |
| Rated frequency | 50Hz/60Hz |
| Wire inlet & outlet | Bottom inlet, bottom outlet |
| Dimension(W*D*H) | 2800*2000*2525mm |
| Weight | <6.8T |
| Installation | Ground mounting |
| Standard | CE,IEC/EN 62271-202:2022 |

* All specifications are subject to change without notice.

MV Backup Cabinet

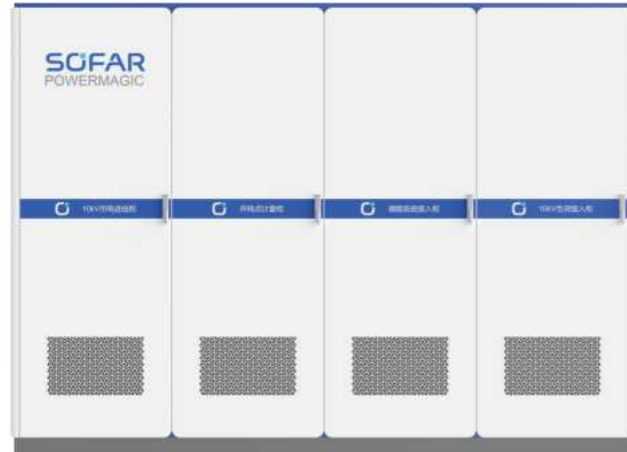

Product Advantages

- Grid-on/off auto-switch
- Pre-assembled design, less on-site renovation
- Easy installation and O&M



| Model | PAC-2M58-W1 |
|-------------------------------|--|
| Rated voltage | 10kV etc. |
| Rated current | 150A @ 10kV |
| Rated frequency | 50Hz/60Hz |
| Grid-On/Off | Auto-switch |
| Ingress protection rating | Enclosure IP4X, Internal cubicle IP2X |
| Operating ambient temperature | -15°C ~ +40°C(indoor installation) |
| Storage ambient temperature | 30°C ~ +60°C |
| Dimension(W*D*H) | MV incomer cabinet 800* 500*2300(Grid connection) Metering cabinet 800* 1500*2300(Metering point) BESS interface cabinet 800* 1500*2300(For BESS) Load feeder cabinet 800* 1500*2300(For 10kV load) |
| Operating altitude | ≤4000 (Standard ≤ 2000m, customized above 2000m) |
| Communication interface | RS485 |
| Standard | CE,IEC/EN 62271-200:2021 |

* All specifications are subject to change without notice.



Product advantages

High Yield

- Advanced three-level technology, max. efficiency 98.9%
- Effective forced air cooling, no derating up to 45°C
- Rack level management, more yielding

Flexible & Reliable

- Bidirectional power conversion system with full four-quadrant operation
- Modular design, easy for design & maintenance
- IP66 protection degree, suitable for outdoor installation

Grid Support

- Compliant with CE, IEC 62477 and grid regulations
- L/HVRT, Fast active/reactive power response



| Model | EBI 215K-R |
|--|---|
| DC Side | |
| Maximum DC Voltage | 1500 V |
| DC Voltage Working Range | 1000-1500 V |
| Maximum DC Current | 220A |
| AC Side (Grid-on) | |
| Rated AC Power | 215 kW |
| Maximum AC Active Power | 237 kW |
| Maximum AC Apparent Power | 237 kVA |
| Rated AC Current | 180 A |
| Maximum AC Current | 198 A |
| Rated Grid Voltage | 690V 3W+PE |
| Grid Voltage Range | 586.5-759V |
| Rated Grid Frequency | 50 / 60 Hz |
| Grid Frequency Range | 45-55Hz /55-65Hz |
| Power Factor | -1-1 |
| Current Total Harmonic Distortion (@Rated Power) | <3% |
| System Characteristics | |
| Working Temperature | -35°C-60°C |
| Relative Humidity | 0-100%, no condensation |
| Noise level | <75 dB |
| Maximum Working Altitude | 4000m |
| Cooling method | Temperature controlled forced air cooling |
| Communication port | CAN, RS485, Ethernet |
| Degree of Protection | IP66 |
| Mechanical Parameters | |
| Dimensions (W*H*D) | 740*265*850mm (without terminals) |
| Weight | <93 kg |

* If the size and parameters of the product are changed, the latest information of the company shall prevail without prior notice.